

MAGIC SWITCH

INTENTIONAL OPENING SENSOR FOR INDUSTRIAL DOORS


Commercial sheet



THE INVISIBLE TOUCH


DESCRIPTION

The **MAGIC SWITCH** is an alternative contactless solution to push-buttons, pull-cords and other manual activators. It embeds a radar reacting to every intentional motion approaching and allowing to activate the door without any physical contact with the sensor. In addition to the comfort of use, the MAGIC SWITCH offers a hygienic opening solution for the retail, pharmaceutical, chemical and healthcare sectors (operating theatres)

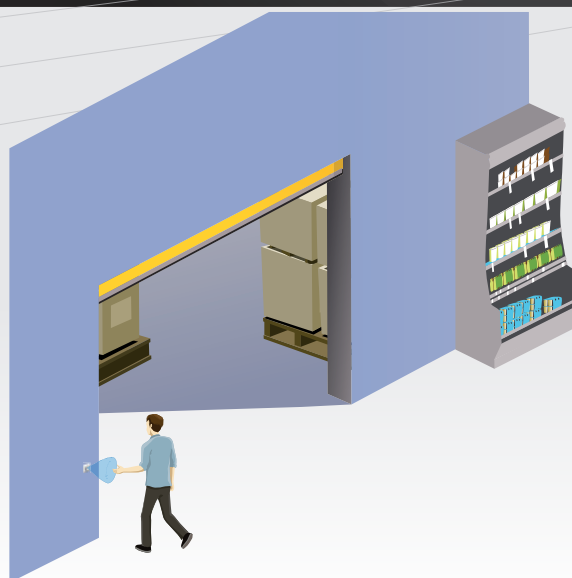

PERFORMANCE

- Microwave module with an adjustable detection area from 10 to 50 cm.
- Ideal hygienic solution for the retail, pharmaceutical, chemical and healthcare sectors.
- Efficient alternative to push-buttons and other manual solutions.
- The microwave technology allows to hide the sensor behind every type of non metallic material for aesthetics and protection against detergent products.

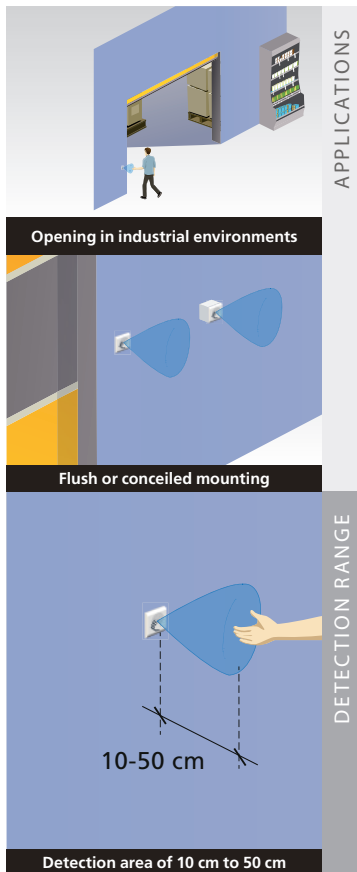

APPLICATIONS

- Retail, pharmaceutical, chemical and healthcare sectors (operating theatres).

DESIGNED FOR INDUSTRIAL ENVIRONMENTS

- Fashionable looks.
- Degree of protection: IP52.

EASE OF INSTALLATION

- Mounting behind non metallic surface possible.
- Flush or concealed mounting.

TECHNICAL SPECIFICATIONS

Technology	Microwave motion sensor
Radiated frequency	24.150 GHz
Transmitter radiated power	< 20 dBm EIRP
Radiated power density	< 5 mW/cm ²
Detection mode	Motion (bidirectional)
Detection range (hand)	+/- 10 to 50 cm if movement towards sensor at 90° (adjustable)*
Output	Relay with switch-over contact (free of potential)
Max. voltage	48V AC - 60V DC
Max. current	1A (resistive)
Max. switching power	30W (DC) / 48 VA (AC)
Output hold time	0.5 s (in PULSE mode)
Min. detection speed	Min. 5 Hz or +/- 3 cm/s, max. 200 Hz or +/- 1,2 m/s
Mains frequency	50 - 60 Hz
Supply voltage	12V to 24V AC +/- 10% 12V to 24V DC +30% / - 10%
Power consumption	< 1.2 W
Dimensions	85 mm (L) x 85 mm (H) x 45 mm (W)
Material	ABS/Polycarbonate
Colour	White
Cable length	Stranded cable up to 16 AWG - 1.5 mm ²
Temperature range	- 20°C - + 55°C
Degree of protection	IP30 with cable connected IP40 flush-mounted without front face IP52 flush-mounted with front face and silicone seal mounted in surface mount box
Norm conformity	R&TTE: 1999/5/EC EMC: 2004/108/EC

Specifications are subject to changes without prior notice

** The adjustment of the detection field 10 cm is possible, but the detection capability of the sensor can not be guaranteed !*

DISCLAIMER This document as well as all other enclosed documents (quotation / specification / other) are provided «as is» without warranties of any kind, either expressed or implied, including but not limited to the implied warranties of merchantability, fitness for a particular purpose, or non-infringement. / Information is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will BEA be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this document or the products to which the information refers. / BEA has the right without liability to change descriptions and specifications at any time. / Prices, shipping and availability are subject to change without prior notice.

