




This drawing is supplied as a General Layout showing relative positions of main components and Guardian Industrial Doors Ltd accepts no responsibility for accuracy until a Site Survey has been undertaken. If the End Plates and Barrel are within a False Ceiling or Soffit a Full Width Access Panel is required. (by others)

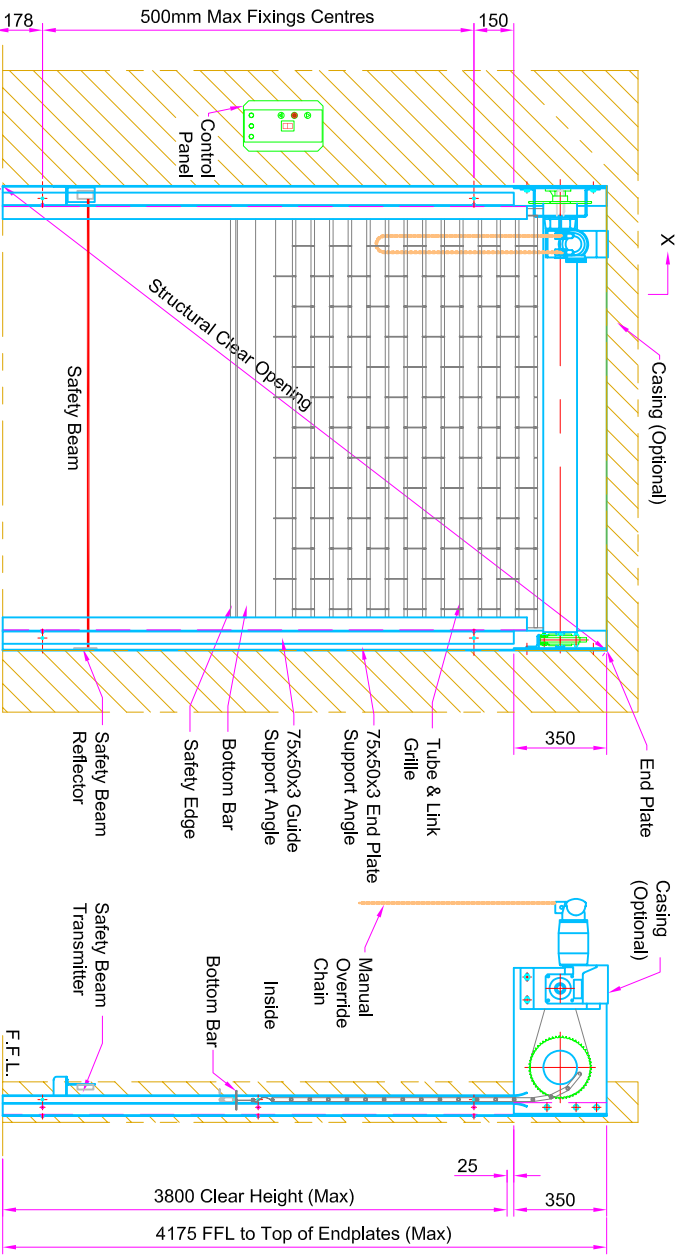

16 amp 3P+N+E CEE PANEL SOCKET TO BE FITTED 1.5m FROM FLOOR & WITHIN 1m OF DOOR (Supplied by others)

| Component | Weights (kg) |
|-----------------|--------------|
| Barrel | 47 |
| Curtain | 147 |
| End Plates | 12 |
| Guides | 26 |
| Angles/Channels | 27 |
| Motor/HCG | 35 |
| Safety Brake | 10 |
| | 304 |

The Client is responsible for making sure that the structure is capable of withstanding the weight of the shutter and suitable fixing points are available for the End Plate and Guide support channel. The chart below shows the weight for a shutter with a maximum structural clear opening of 3500mmW x 4175mm H

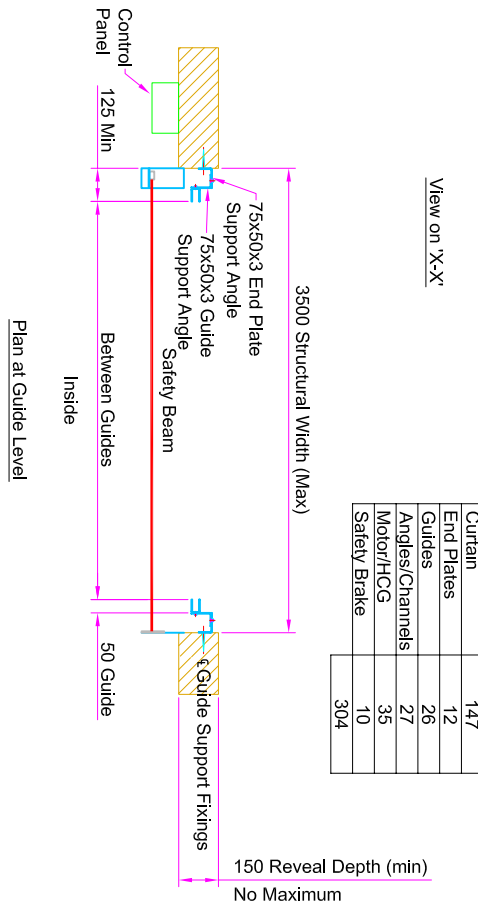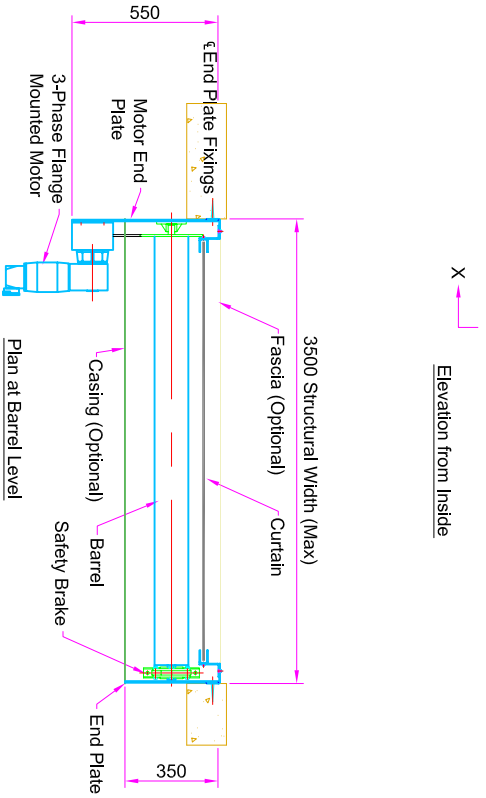

GUARDIAN

DOOR SOLUTIONS FOR ALL REQUIREMENTS

UNLESS OTHERWISE INDICATED ALL DIMENSIONS IN MILLIMETERS AND ALL TOLERANCES ±1.0

45 Progress Rd,
Leigh on Sea, S59 5PR
Tel: +44(0)1702 512424
Fax: +44(0)1702 260117
www.guardindoors.com

| DRAWN | CHK'D | APP'D | DATE | SCALE | Dwg No: | ISSUE | DATE | APP'D |
|-------|-------|-------|------|-------|----------------|-------|-------|-------|
| MB | | | | NTS | Apollo TP-1-LH | 1 | 04/07 | PN |

TITLE
APOLLO 3-ph FLANGE MOUNTED MOTOR REVEAL FIX.
3500mm W x 4175mm H Max.

Guardian maintains a policy of progressive design and we reserve the right to modify specifications without prior notice or alteration to this drawing