

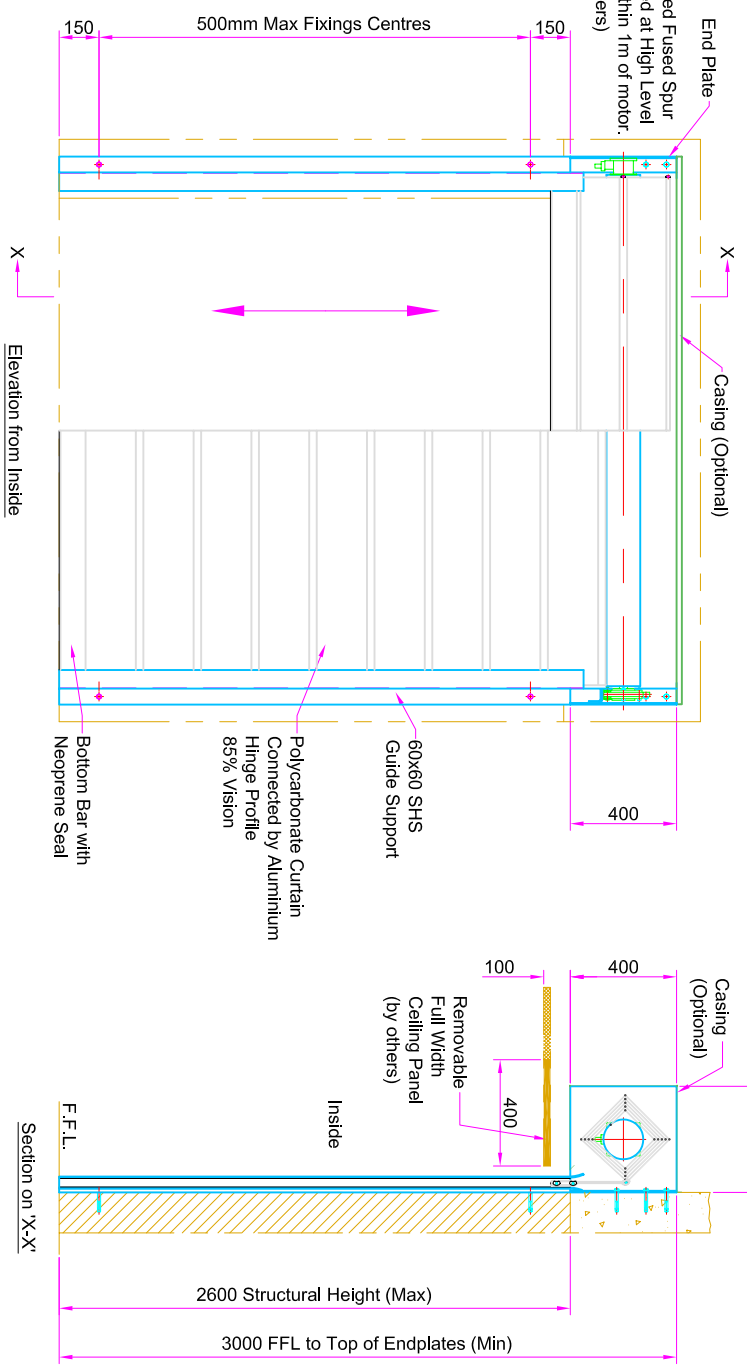


End Plate
Switched Fused Spur
required at High Level
and within 1m of motor.
(by others)

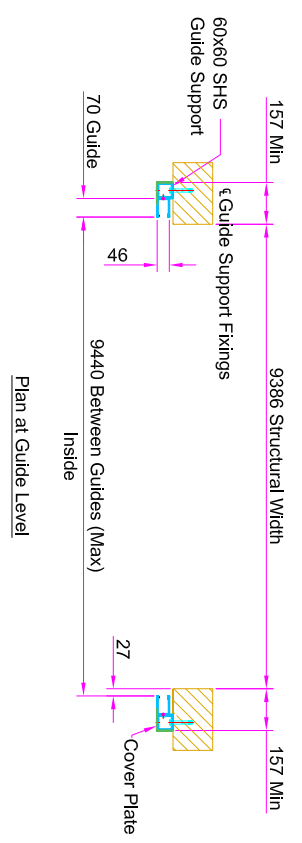

Switched Fused Spur
required at High Level
and within 1m of motor.
(by others)

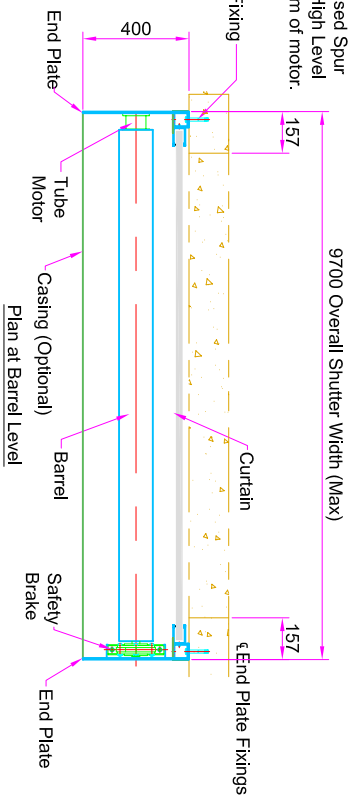

This drawing is supplied as a General Layout showing relative positions of main components and Guardian Industrial Doors Ltd accepts no responsibility for accuracy until a Site Survey has been undertaken.

If the End Plates and Barrel are within a False Ceiling or Soffit a Full Width Access Panel is required. (by others)

Fixing To:-	
Steel	M8/M10 Set Screws
Brick	M8/M10 Rawbolts/Sleeve Anchors
Blockwork	M8/M10 Rawbolts/Sleeve Anchors
Timber	M8/M10 Coach Screws
Concrete	M8/M10 Rawbolts

The Client is responsible for making sure that the structure is capable of withstanding the weight of the shutter and suitable fixing points are available for the End Plate and Guide support channel.

GUARDIAN

DOOR SOLUTIONS FOR ALL REQUIREMENTS

45 Progress Rd.
Leigh on Sea, S59 5PR
Tel: +44(0)1702 512424
Fax: +44(0)1702 260117
www.guardindoors.com

UNLESS OTHERWISE INDICATED
ALL DIMENSIONS IN MILLIMETERS
AND ALL TOLERANCES ±1.0

DRAWN	CHK'D	APP'D	DATE	SCALE	Dwg No:	ISSUE	DATE	APP'D
MB			21/05/09	NTS	MG-TM-9700-LH	1	21/05/09	RE

TITLE
TUBE MOTOR FACE FIX MAXI GLAZE
9700mm W x 3000mm H Max.

Guardian maintains a policy of progressive design and we reserve the right to modify specifications without prior notice or alteration to this drawing